




# Typical lightblueline Installation Schematic for Side Street (e.g., Spring Street)

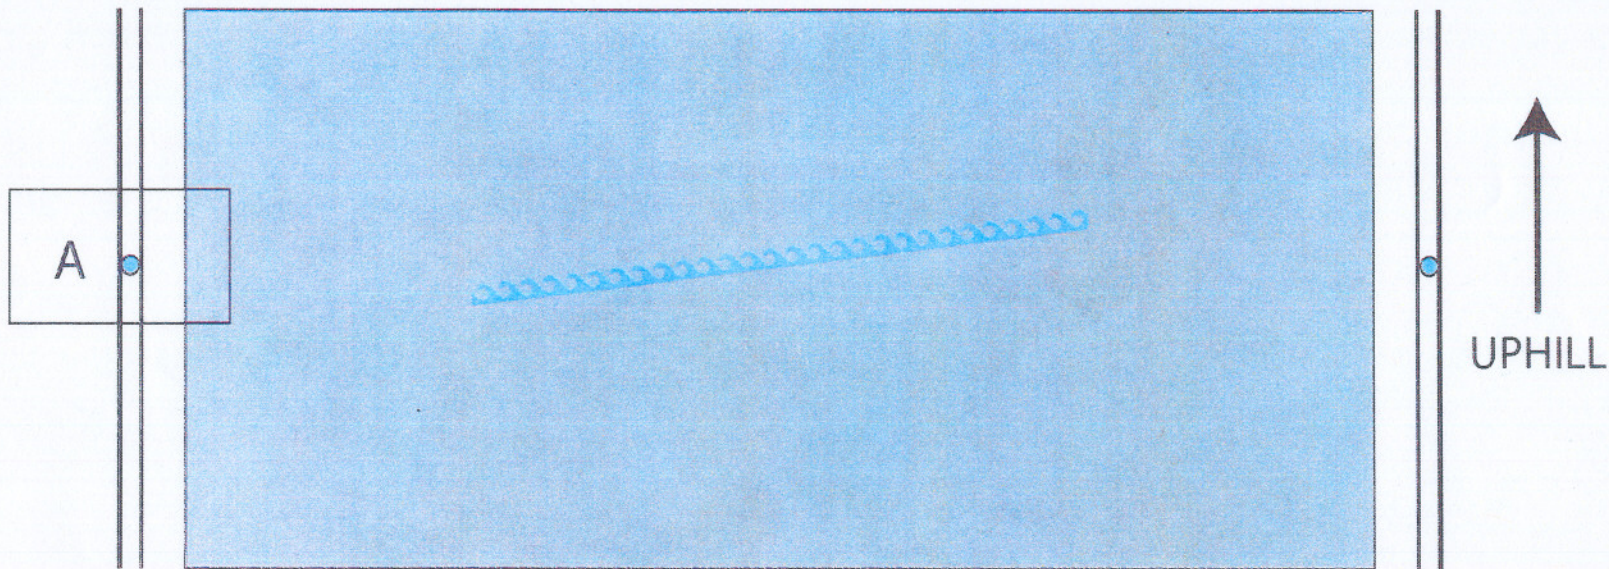

- Typical lightblueline installation on a Side Street:
1. Five 34.5 inch segments are centered on the midline of the street:  
TOTAL LINE LENGTH = 14 feet, 4.5 inches
  2. Line is laid down approximately seven degrees from perpendicular (to symbolize a geographical contour, in contrast to a human marker).
  3. Wave tops are on the uphill side of the line.
  4. Curb markers are epoxied to curb tops with text readable from the sidewalk.

detail  
A

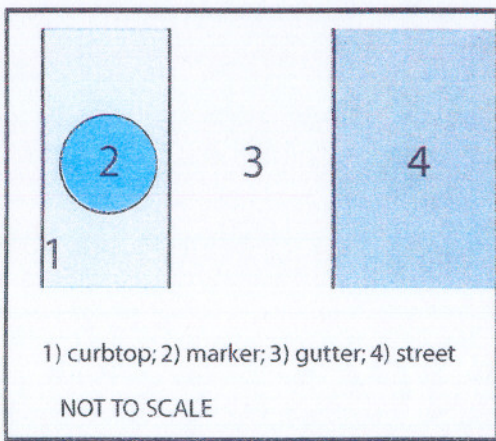

ATTACHMENT 3